

# DeltaFx™ Fiberized Spray Applicator

DeltaFx™ fiberized spray applicators provide exceptional value and flexibility for wide adhesive lamination. Using the ITW Dynatec patented Laminate Plate Technology, DeltaFx™ provides an easy-to-use and maintain Non-Contact Application System. An excellent choice for a number of applications where speed, versatility and durability are required that works with all types of hot melt adhesives including PUR Hot Melts.

## DeltaFx™ Fiberized Spray Applicator:

- Consistent coat weight application eliminates ridges and valleys common when using swirl applicators.
- Random fiber patterns use less adhesive than spiral spray and maintain or improve bond strength.
- Adhesive pattern widths can be easily adjusted by controlling the head height to the substrate.
- Minimizes clean-up and reduces downtime.

### Performance


Continuous application of adhesives including: PSA, APAO, and Reactive Hot Melts.

### Flexibility

Quick-change pattern width(s) by adjusting the distance between head position and the substrate.

### Innovation

Single nozzle permits a range of pattern widths up to 12 inches. (adhesive dependent)

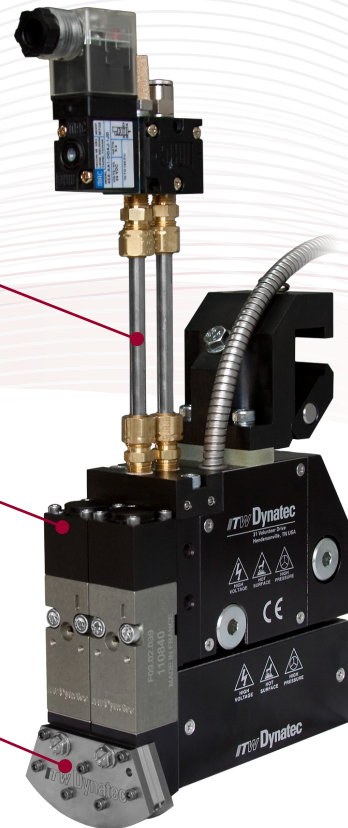


ITW Dynatec - DeltaFx™ Brand Fiberized Spray Applicators

## The Dynatec Difference...

### Easy Pattern Adjustment and Simplification

DeltaFx™ applicators allow up to a 12" pattern width per head and can be easily changed to accommodate smaller widths by adjusting the distance between the applicator and the substrate itself. For applications requiring the use of reactive hot melt adhesives, DeltaFx™ has been designed with direct glue paths which eliminate blind and inactive adhesive

passages. By reducing the risk of cured adhesive, DeltaFx™ provides a long and trouble-free operating life. Easy to clean and easy to set up, DeltaFx™ is the answer for those looking to reduce down time, improve productivity and reduce floor space in their laminating station.

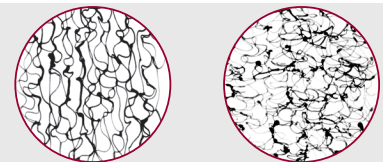


Actual Fiber Patterns Shown

# DeltaFx™ Fiberized Spray Applicator



System	DeltaFx™	Comments
Application Width per Nozzle	Up to 305 mm (12 in)	Varies depending upon distance to substrate.
Adhesive Viscosity	Lab Test Required	-
Temperature Range	40°C to 200°C (100°F to 400°F)	-
Warm-Up Time	15 min. (cold start)	-
Typical Application Air Pressure	0.8 - 1.5 bar (12-22 psi)	Depends upon type of adhesive.
Typical Air Flow per Nozzle	2,500 (nl/h) (1.5 SCFM)	-
Wattage Manifold	450W	-
Wattage Air Heater	600W	-

\*Laboratory tests are required to verify pattern widths as adhesive viscosity and other variable effect application performance.

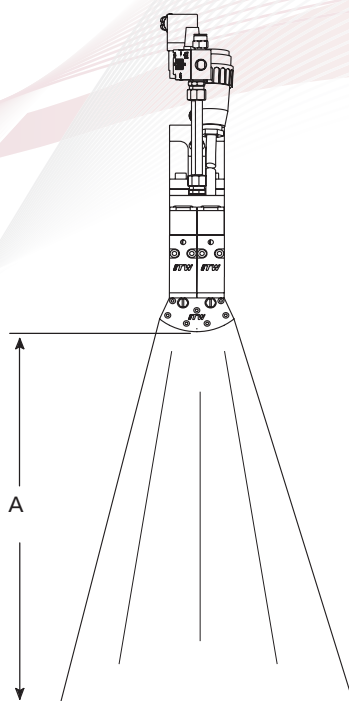

## DeltaFx™ Mounting Brackets

Only the DeltaFx™ adhesive applicator allows web widths to be adjusted on the fly by changing the distance between the applicator and substrate itself.

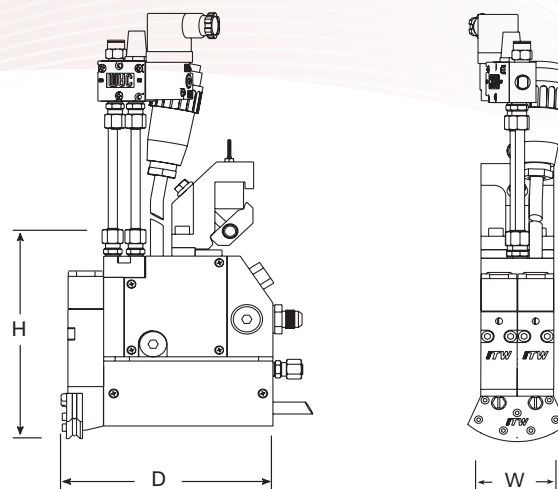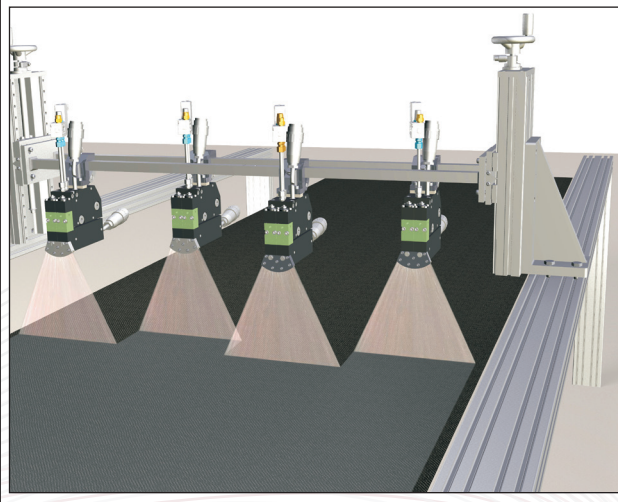

Dimensions	DeltaFx™
Height (H)	261 mm (10.28 in)
Depth (D)	146.3 mm (5.76 in)
Width (W)	50 mm (1.97 in)
Adjustment (A)	50 mm-200 mm (1.97 in to 7.8 in)

**ITW Dynatec**

© 12/2010 ITW Dynatec

ITW Dynatec reserves the right to discontinue or change specifications, designs, materials and equipment without notice or obligation.

### ASIA

ITW Dynatec Suzhou  
Unit2, B1 Building  
No.9 Weixin Road  
SIP, Suzhou, China 215122  
Telephone +86.512.6289.0620  
Fax +86.512.6289.0621  
dynatecsuzhou@itwdynatec.cn

### AMERICAS

ITW Dynatec  
31 Volunteer Drive  
Hendersonville, TN 37075  
Telephone 615-824-3634  
+1.800.860.6150  
Fax +1.615.264.5248  
dynatec@itwdynatec.com

### JAPAN

ITW Dynatec K.K.  
Tsukimura Building 5th Floor  
26-11, Nishikamata 7-chome  
Ota-ku, Tokyo 144-0051, Japan  
Telephone +81.3.5703.5501  
Fax +81.3.5703.5505  
info@itwdynatec.co.jp

### EUROPE, AFRICA and MIDDLE EAST

ITW Dynatec GmbH  
Industriestrasse 28  
D-40822 Mettmann, Germany  
Telephone +49.210.4915.0  
Fax +49.210.491.5111  
e.mail@itwdynatec.de

Visit us at [www.itwdynatec.com](http://www.itwdynatec.com)